



P.C.B Layout

Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish	:Gold Plated
Standard	:Gold Flash all over

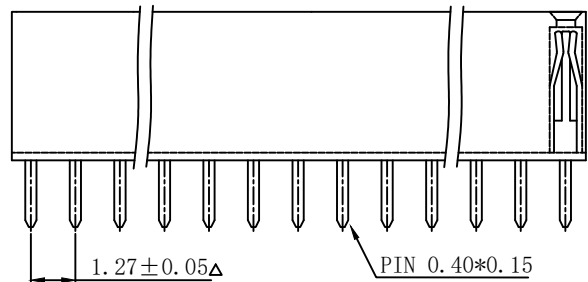

Series

F603

(Female Header
Dual Row)
F603 (1.27 H:4.3)

Connector
Type

X

S: Straight Type

Contact
Plating

X

G: Gold Flash
T: Tin Plated
A: 10U" Gold
B: 15U" Gold
C: 20U" Gold
© Duplex Plating
D: Gold Flash/Tin
(Standard: G)

Material

X

N: Nylon-6T
(Standard: N)

Pin Length mm

DXXX

S-D
D024
(Standard: S-D024)

Number of
Contacts

-XX

(04 TO 80
Contacts)



东莞市康耐特科技有限公司

Dongguan KNT-Electronics Technology Co., LTD

TEL: +860769-83999188 +860769-83999660

DESCRIPTION(内容):

1.27mm Female Header H:4.3 W:3.0 180°
Nylon-6T(环保材料)

PART NO:
(料 號)

F603-SGN-D024-XX

DWG NO(圖號):

DRAWN(製圖):

LZC

CHECKED(確認):

Jerry

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.0 ±0.20
.00 ±0.15
.000 ±0.10

SCALE(比例):

1:XX



REV: A/1

UNIT: mm

SIZE: A4

SHEET: 1/1

REV

1

2

3

4

DESCRIPTION

△ 此符號表示重點管控尺寸

DATE

2022.05.31